



IECEx Certificate of Conformity

INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification System for Explosive Atmospheres

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.: **IECEx INE 18.0039X** Page 1 of 4 [Certificate history:](#)
Issue 0 (2019-02-22)

Status: **Current** Issue No: 1

Date of Issue: 2020-09-14

Applicant: **APPLETON Group - ATX**
E.I.N.
35 rue André Durouchez
CS 98017
80084 Amiens cedex 2
France

Equipment: **LED Luminaire type FELED30 - Model: FELED *******

Optional accessory:

Type of Protection: **eb mb db tb**

Marking: Ex eb mb IIC T4 Gb for standard version without switch
Ex db eb mb IIC T4 Gb for standard version with switch and for emergency versions
Ex tb IIIC T... Db IP66 for all versions

Approved for issue on behalf of the IECEx
Certification Body:

Thierry HOUEIX

Position:

Ex Certification Officer

Signature:
(for printed version)

Date:

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting www.iecex.com or use of this QR Code.



Certificate issued by:

INERIS
Institut National de l'Environnement Industriel et des Risques
BP n2 / Parc Technologique ALATA
F-60550 Verneuil-en-Halatte
France



controlling risks
for sustainable development



IECEx Certificate of Conformity

Certificate No.: **IECEx INE 18.0039X**

Page 2 of 4

Date of issue: 2020-09-14

Issue No: 1

Manufacturer: **APPLETON Group - ATX**
E.I.N.
35 rue André Durouchez
CS 98017
80084 Amiens cedex 2
France

Additional
manufacturing
locations:

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended

STANDARDS :

The equipment and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards

IEC 60079-0:2017 Explosive atmospheres - Part 0: Equipment - General requirements
Edition:7.0

IEC 60079-1:2014-06 Explosive atmospheres - Part 1: Equipment protection by flameproof enclosures "d"
Edition:7.0

IEC 60079-18:2017 Explosive atmospheres - Part 18: Protection by encapsulation "m"
Edition:4.1

IEC 60079-31:2013 Explosive atmospheres - Part 31: Equipment dust ignition protection by enclosure "t"
Edition:2

IEC 60079-7:2017 Explosive atmospheres - Part 7: Equipment protection by increased safety "e"
Edition:5.1

This Certificate **does not** indicate compliance with safety and performance requirements other than those expressly included in the Standards listed above.

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in:

Test Report:

[FR/INE/ExTR19.0002/01](#)

Quality Assessment Report:

[FR/LCI/QAR07.0008/15](#)



IECEx Certificate of Conformity

Certificate No.: **IECEx INE 18.0039X**

Page 3 of 4

Date of issue: 2020-09-14

Issue No: 1

EQUIPMENT:

Equipment and systems covered by this Certificate are as follows:

This product is a LED luminaire protected by increased safety "eb" and by enclosure "tb" with encapsulated LED array "mb" and encapsulated LED driver "mb". It exists in standard version (3K to 7K) or emergency maintained and non-maintained versions (3K and 5K only).

For standard version: one "db" positive safety Switch type IS3 certified IECEx LCI 10.0033U or "db" & "eb" switch Type XESW... certified IECEx INE 11.0010U can be added as an option to switch the mains off before opening.

For emergency versions, the components below are added:

- "eb" & "mb" Battery Management Module type BMM certified IECEx UL 16.0097U.

- "mb" Encapsulated LED Indicator.

- "mb" Encapsulated Fuse.

- A "db" positive safety Switch type IS3 certified IECEx LCI 10.0033U or a "db" & "eb" switch Type XESW... certified IECEx INE 11.0010U to switch off the battery.

It comprises a body and a transparent lens with hinges.

The sealing is achieved using a gasket fixed in the groove of the lens.

The LED luminaire has two configurations in function of axis and lens gaskets used. The ambient operating temperature range of the luminaire is different according to these configurations. Details are specified in Annex.

This certificate covers the generation 3 of LED luminaire.

The LED luminaire can be equipped with the following certified Ex components. The list is provided in Annex.

SPECIFIC CONDITIONS OF USE: YES as shown below:

- Permitted supply short circuit: 500 A.
- Beware of electrostatic charges: Wipe / clean only with a moist cloth.



IECEx Certificate of Conformity

Certificate No.: **IECEx INE 18.0039X**

Page 4 of 4

Date of issue: 2020-09-14

Issue No: 1

DETAILS OF CERTIFICATE CHANGES (for issues 1 and above)

For issue 01:

1. IEC 60079-28 removed
2. IEC 60079-1:2014 added
3. Switch added for standard version
4. Emergency (maintained and non-maintained) versions added

Annex:

[IECEx INE 18.0039X-01_Annex.pdf](#)



IECEX Certificate of Conformity

Certificate No.: IECEx INE 18.0039X

Issue No.: 1

Page 1 of 5

Annex: IECEx INE 18.0039X-01_Annex.pdf

PARAMETERS RELATING TO THE SAFETY

Standard version				
	MODEL			
	3K	4K	5K	7K
Rated supply voltage	120-277Vac, 50/60 Hz; 170-300Vdc			
Maximum current	0.3 A	0.4 A	0.45 A	0.65 A
Quantity of driver	1	1	1	2
Maximum driver output current	0.55 A	0.8 A	0.95 A	1.35 A (0.675 A for each driver)

Emergency versions		
	MODEL	
	3K	5K
Rated supply voltage	120-277Vac, 50/60 Hz;	
Maximum current	0.3 A	0.45 A
Quantity of driver	1	1
Maximum driver output current	0.55 A	0.95 A

MARKING

Marking has to be readable and indelible; it has to include the following indications:

- APPLETON – ATX and/or EMERSON
- 80084 AMIENS – France
- Type: FELED30
- Model: FELED***** (1)
- IECEx INE 18.0039X
- Serial Number
- Ex eb mb IIC T4 Gb for standard version without switch
- Ex db eb mb IIC T4 Gb for standard version with switch and for emergency versions
- Ex tb IIIC T...°C (2) Db for all versions
- IP66
- -40°C or -30°C (3) ≤ Ta ≤ +40°C to +55°C (2) depending on the model (Standard version without Ex-Tech switch)
- -40°C or -30°C (3) ≤ Ta ≤ +40°C to +50°C (2) depending on the model (Standard version with Ex-Tech switch)
- -20°C ≤ Ta ≤ +40°C to +50°C (2) depending on the model (Emergency versions)
- Rated voltage
- Maximum current
- WARNING:
 - DO NOT OPEN WITH POWER ON
 - DO NOT OPEN WHEN AN EXPLOSIVE ATMOSPHERE IS PRESENT
 - BEWARE OF ELECTROSTATIC CHARGES: WIPE / CLEAN ONLY WITH A MOIST CLOTH



IECEX Certificate of Conformity

Certificate No.: IECEx INE 18.0039X


Issue No.: 1

Page 2 of 5

Annex: IECEx INE 18.0039X-01_Annex.pdf

(1) Number Logic:

FELED

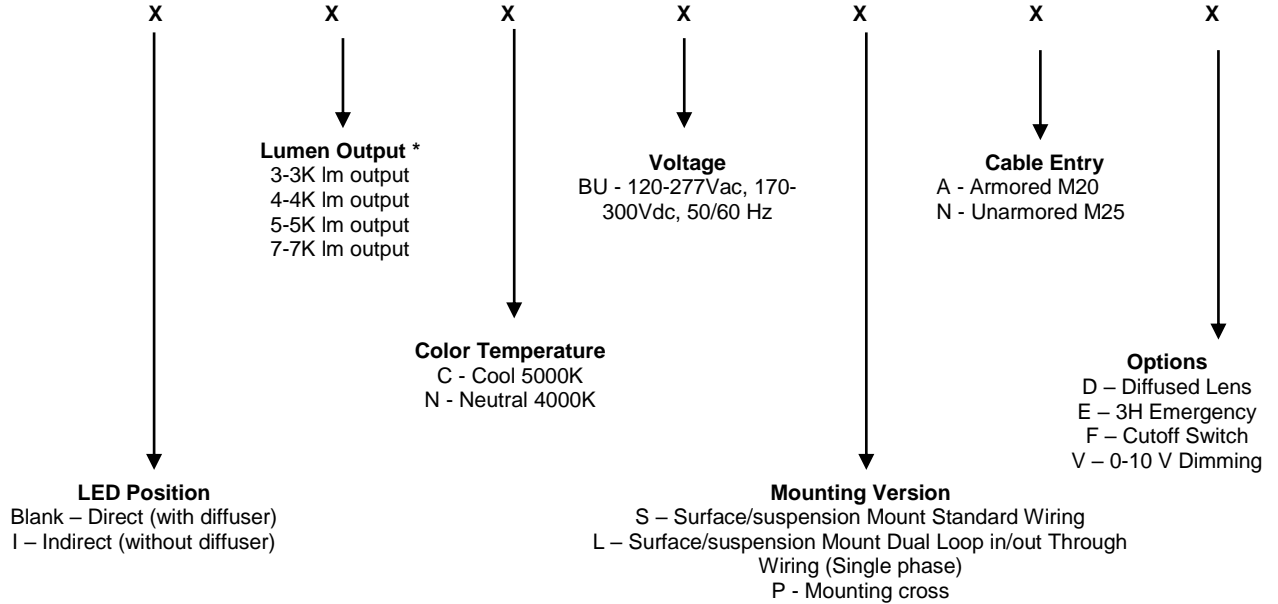

*** Lumen Output:**

- Standard version: 3K to 7K
- Emergency versions: 3K and 5K only



IECEX Certificate of Conformity

Certificate No.: IECEx INE 18.0039X

Issue No.: 1

Page 3 of 5

Annex: IECEx INE 18.0039X-01_Annex.pdf

(2) Maximum surface temperatures according to Maximum ambient temperature:

Standard version						
Explosive atmosphere			Dust			
Tamb max			+40°C	+45°C	+50°C	+55°C
Model	Position	Diffuser	Tsurface			
2ft 5000K or 4000K 3000Lm or 4000Lm	Horizontal	with or without	60	65	70	75
	Vertical	with or without	60	65	70	75
4ft 5000K or 4000K 5000Lm or 7000Lm	Horizontal	with or without	60	65	70	75
	Vertical	with or without	60	65	70	75

Standard version						
Explosive atmosphere			Gas			
Tamb max			+40°C	+45°C	+50°C	+55°C
Model	Position	Diffuser	Temperature class			
2ft 5000K or 4000K 3000Lm or 4000Lm	Horizontal	with or without	T4	T4	T4	T4
	Vertical	with or without	T4	T4	T4	T4
4ft 5000K or 4000K 5000Lm or 7000Lm	Horizontal	with or without	T4	T4	T4	T4
	Vertical	with or without	T4	T4	T4	T4

Emergency versions						
Explosive atmosphere			Gas			
Tamb max			+40°C	+45°C	+50°C	
Model	Position	Diffuser	Temperature class			
2ft 5000K or 4000K 3000Lm	Horizontal	with or without	T4	T4	T4	
	Vertical	with or without	T4	T4	T4	
4ft 5000K or 4000K 5000Lm	Horizontal	with or without	T4	T4	T4	
	Vertical	with or without	T4	T4	T4	



IECEX Certificate of Conformity

Certificate No.: IECEx INE 18.0039X

Issue No.: 1

Page 4 of 5

Annex: IECEx INE 18.0039X-01_Annex.pdf

Emergency versions					
Explosive atmosphere			Dust		
Tamb max			+40°C	+45°C	+50°C
Model	Position	Diffuser	Tsurface		
2ft 5000K or 4000K 3000Lm	Horizontal	with or without	60	65	70
	Vertical	with or without	60	65	70
4ft 5000K or 4000K 5000Lm	Horizontal	with or without	60	65	70
	Vertical	with or without	60	65	70

(3) Minimum ambient temperatures configurations:

Configuration	Configuration 1	Configuration 2
Type of axis gasket	NBR 70sh 36624	EPDM 55914
Type of lens gasket	EPDM BK1101	XIAMETER Silicon
Minimum ambient temperature	-30°C	-40°C

ROUTINE EXAMINATIONS AND TESTS

Each pieces of equipment defined above must have successfully passed before delivery:

- In accordance with clause 7.1 of IEC 60079-7 standard, a test of dielectric strength on each of the different circuits.
- In addition, for the encapsulated LED Indicator and the encapsulated Fuse:

Each pieces of equipment defined above:

- shall be subjected to a visual inspection according to 9.1 of IEC 60079-18;
- shall be subjected to a dielectric strength test to test the isolation of circuits from each other and from their environment according to 9.2 of IEC 60079-18.



IECEX Certificate of Conformity

Certificate No.: IECEx INE 18.0039X

Issue No.: 1

Page 5 of 5

Annex: IECEx INE 18.0039X-01_Annex.pdf

CONFIGURATION OF THE AXIS AND LENS GASKET

Configuration	Configuration 1	Configuration 2
Type of axis gasket	NBR 70sh 36624	EPDM 55914
Type of lens gasket	EPDM BK1101	XIAMETER Silicon
Ambient temperature range	-30°C up to +55°C (standard version without Ex-Tech switch) -30°C up to +50°C (standard version with Ex-Tech switch) -20°C up to +50°C (emergency versions)	-40°C up to +55°C (standard version without Ex-Tech switch) -40°C up to +50°C (standard version with Ex-Tech switch) -20°C up to +50°C (emergency versions)

LIST OF Ex COMPONENTS

Designation of component	Manufacturer	Type	Certificate	Standards	Ex marking
Encapsulated LED Array	Appleton Group - ATX	299707430 and 299707539	IECEX UL 17.0008U	IEC 60079-0 :2017 IEC 60079-18 :2014 ⁽¹⁾	Ex mb IIC Gb
Drivers for Light-Emitting-Diode Arrays	Appleton Group - ATX	APMZ050C135UD	IECEX UL 17.0067U	IEC 60079-0 :2017 IEC 60079-18 :2014 ⁽¹⁾	Ex mb IIC Gb
Feed through and protective conductor terminal blocks	Weidmüller Interface GmbH & Co. KG	WDU-WPE	IECEX ULD 14.0005U	IEC 60079-0:2011 ⁽²⁾ IEC 60079-7:2006-07 ⁽²⁾	Ex eb IIC
Terminal Strips	Weidmüller Interface GmbH & Co	MK 3	IECEX SIR 05.0036U	IEC 60079-0:2004 ⁽³⁾ IEC 60079-7:2001 ⁽³⁾	Ex e II
Switch	Appleton - ATX	IS3	IECEX LCI 10.0033U	IEC 60079-0:2017 IEC 60079-1:2014-06	Ex db IIC Gb
Switch	Ex-tech solution	XESW...	IECEX INE 11.0010U	IEC 60079-0:2011 ⁽⁴⁾ IEC 60079-1:2014-06 IEC 60079-7: 2015 ⁽⁴⁾	Ex db eb IIC Gb

(1) The Ex component is not impacted by the major technical changes of IEC 60079-18:2017

(2) The Ex component is not impacted by the major technical changes of IEC 60079-0:2017, IEC 60079-7:2015 and IEC 60079-7:2017

(3) The Ex component is not impacted by the major technical changes of IEC 60079-0:2007-10, IEC 60079-0:2011, IEC 60079-0:2017, IEC 60079-7:2006-07, IEC 60079-7:2015 and IEC 60079-7:2017

(4) The Ex component is not impacted by the major technical changes of IEC 60079-0:2017 and IEC 60079-7:2017

In addition, the emergency versions are equipped with the following certified component:

Designation of component	Manufacturer	Type	Certificate	Standards	Ex marking
Emergency Lighting and Power Equipment Component	Appleton - ATX	BMM	IECEX UL 16.0097U	IEC 60079-0 : 2011 ⁽⁵⁾ IEC 60079-18 : 2017 IEC 60079-7: 2017	Ex eb mb IIC Gb

(5) The Ex component is not impacted by the major technical changes of IEC 60079-0:2017